




ITEM	SPECIFICATION		
Clear-Span Width	8m	10m	12m
Eave Height	3m		
Ridge Height	4.44m	4.76m	5.20m
Roof Pitch	20°		
Bay Distance	5m		
Longest Component	4.4m	5.5m	6.4m
Minimum Tent Length	10m		
Maximum Tent Length	No Limit		
Roof Fixing	Bar Tensioning		
Main Profile	122 x 68 x 3mm (4-channel)		
Max Allowed Windspeed	80km/hr 0.3kn/m2		
Eave Connection	Hot-dip galvanized steel insert		
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)		
Cover Material	850gsm White or	650gsm White PVC	
Wall Fabrics	Coloured PVC	850gsm Coloured PVC	
	950gsm Clear PVC	950gsm Clear PVC	
Printing	Full Roof Digital Printing		
Engineer Certification	Engineer Structural Certificate		
Manufacturer's Warranty	10 Year Frame 5 Year White / Coloured PVC 2 Year Printed PVC / Clear PVC		

ACCESSORIES

Accessories
 PVC Window Sidewalls
 Rain Gutter
 Lining & Curtains
 Glass & Aluminum Door Units
 Hard Walling System
 Glass Walling System
 Transparent PVC Cover & Sidewall
 Flooring Systems
 Weight Plate


AVAILABLE COLOURS

*additional cost may be applicable and subject to availability

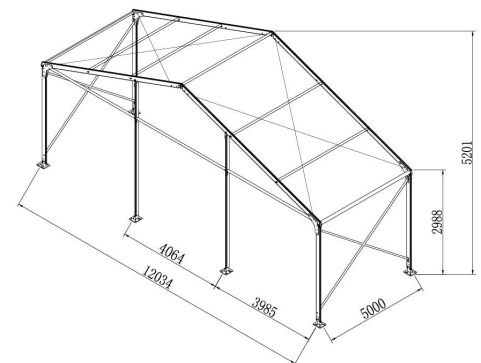


FRAMEWORK & MAIN PROFILES

122 x 68 x 3mm (4-channel)

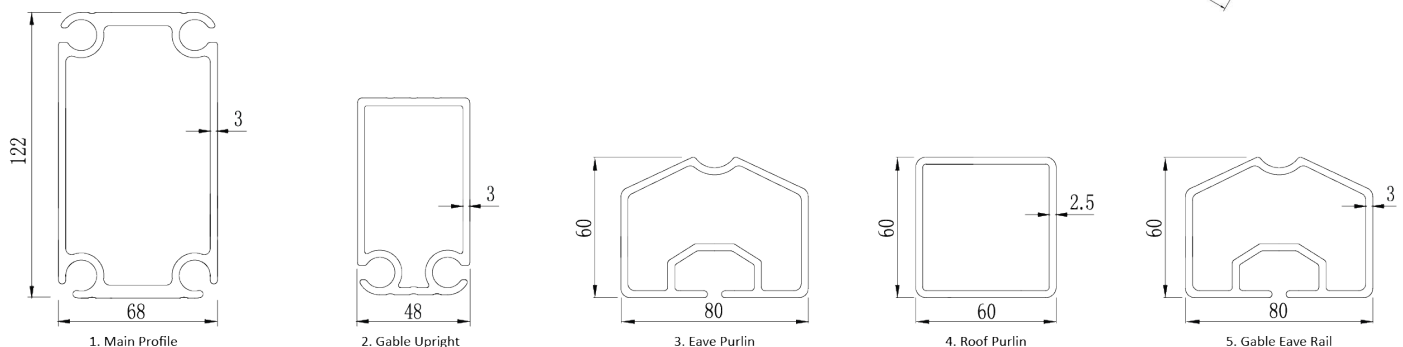


STYLES AVAILABLE

A FRAME

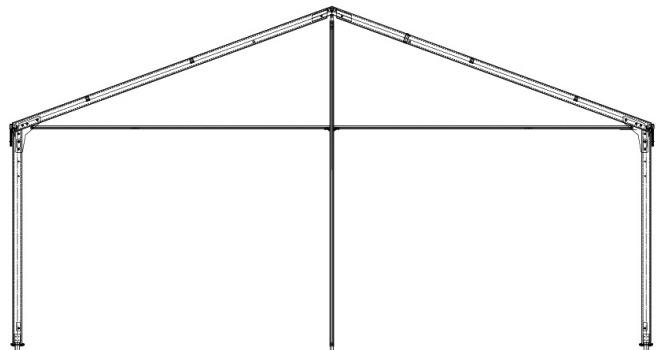


ACRUM

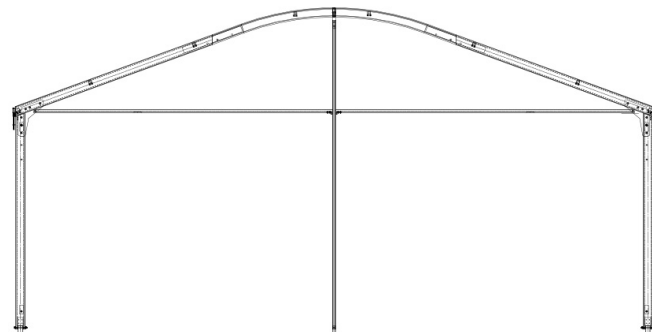


SPANS AVAILABLE

8m GABLE SPAN

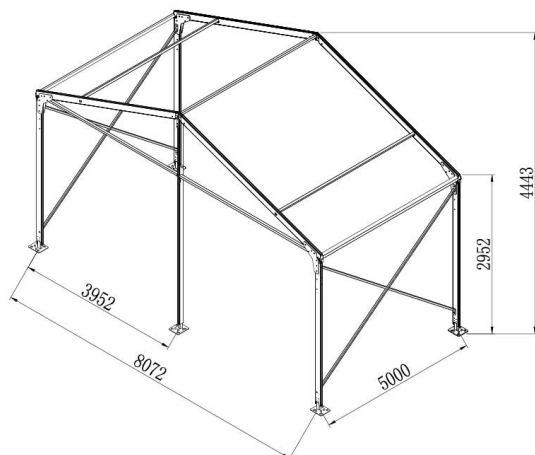

10m GABLE SPAN

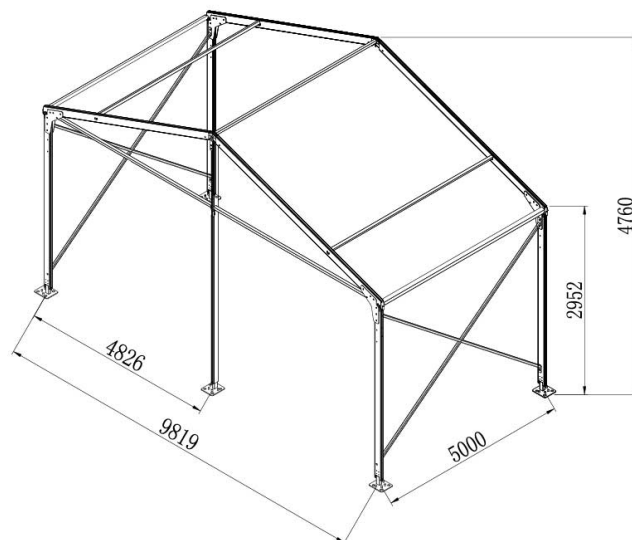

12m GABLE SPAN

