



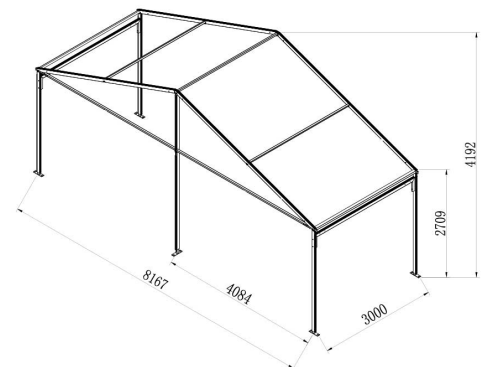
ITEM	SPECIFICATION				
Clear-Span Width	3m	4m	5m	6m	8m
Eave Height	2.6m				
Ridge Height	3.23m	3.41m	3.59m	3.77m	4.19m
Roof Pitch	20°				
Bay Distance	3m				
Longest Component	3m	3.9m	3.6m	3.2m	4.4m
Minimum Tent Length	6m				
Maximum Tent Length	No Limit				
Roof Fixing	Bar Tensioning				
Main Profile	82 x 48 x 3mm (2-channel)				
Max Allowed Windspeed	80km/hr 0.3kn/m2				
Eave Connection	Hot-dip galvanized steel insert				
Framework Material	Hard pressed extruded aluminium 6061/T6 (13HW)				
Cover Material	850gsm White or		650gsm White PVC		
Wall Fabrics	Coloured PVC		850gsm Coloured PVC		
	950gsm Clear PVC		950gsm Clear PVC		
Printing	Full Roof Digital Printing				
Engineer Certification	Engineer Structural Certificate				
Manufacturer's Warranty	10 Year Frame 5 Year White / Coloured PVC 2 Year Printed PVC / Clear PVC				

ACCESSORIES

Accessories
 PVC Window Sidewalls
 Rain Gutter
 Lining & Curtains
 Glass & Aluminum Door Units
 Hard Walling System
 Glass Walling System
 Transparent PVC Cover & Sidewall
 Flooring Systems
 Weight Plate


AVAILABLE COLOURS







*additional cost may be applicable and subject to availability



FRAMEWORK & MAIN PROFILES

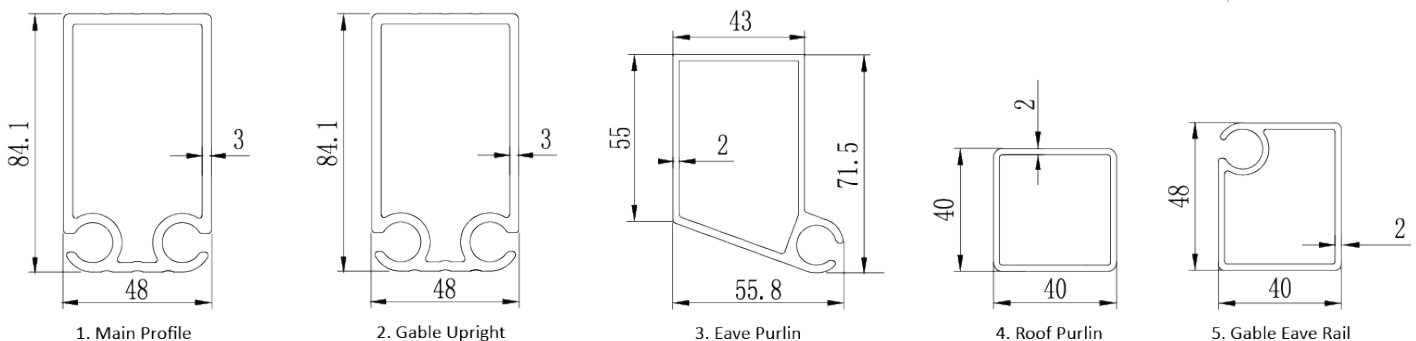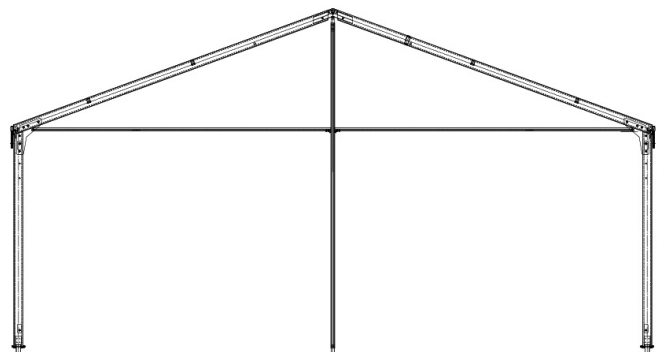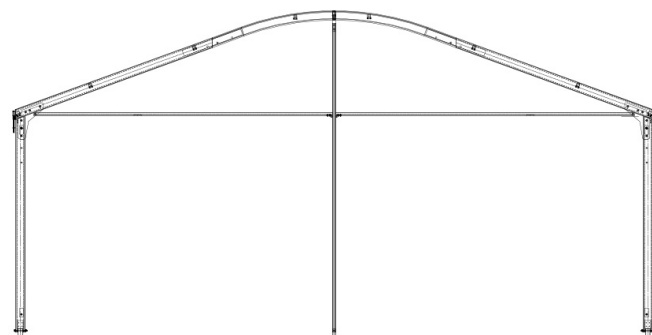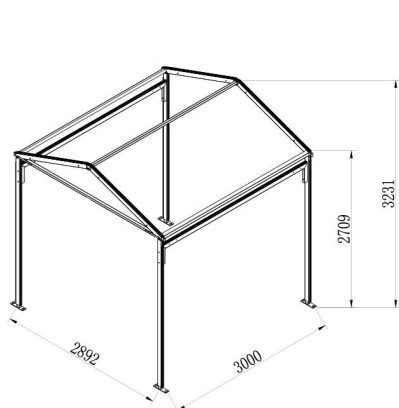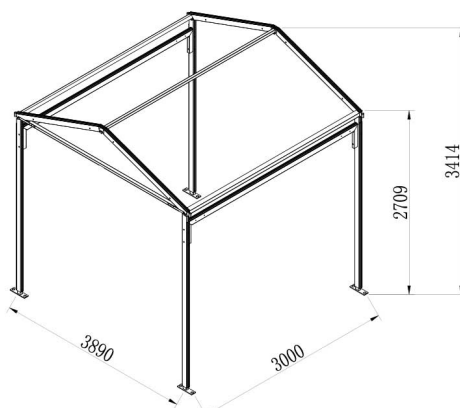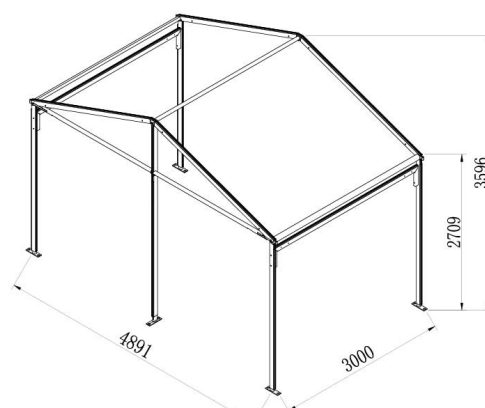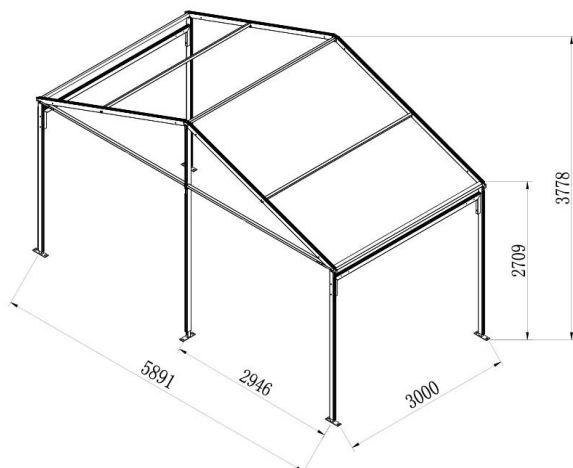84mm x 48mm 3mm



STYLES AVAILABLE
A FRAME

ACRUM

SPANS AVAILABLE
3m GABLE SPAN

4m GABLE SPAN

5m GABLE SPAN

6m GABLE SPAN

8m GABLE SPAN
